



# PREMIUM **INTERIOR**



**WONDER KOTE**

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

**GREAT PAINT. GREAT PEOPLE.**

**hallman  
lindsay**  
QUALITY PAINTS®

# WONDER KOTE

WONDER KOTE interior latex delivers the perfect balance between long-lasting beauty and fast, easy application that professionals have trusted for decades. High-hiding formula provides exceptional coverage and seamless touch-up for fast, easy color changes and job completion. The durable and washable finish repels stains, scuffs, and other signs of everyday living for lasting beauty and protection.

WONDER KOTE is our premium line of interior low-VOC finishes designed for consistent results with custom painting projects. These products can be applied to a variety of surfaces including drywall, plaster, and previously painted surfaces. They can be applied as a premium upgrade in new construction projects or as a workhorse line for residential and commercial repainting projects.

## FEATURES

- Easy Custom Color Changes
- Great Durability
- Livable & Lasting Finish
- Reliable Performance

## BENEFITS

### Maintenance Friendly Finish


Premium formula allows most stains to easily wipe off and release with soap and water. Seamlessly touchup stubborn stains, dings, and scuffs.

### Reliable Coverage

Improved hide reduces the number of coats and time spent cutting compared to typical professional finishes.

### Easy Application

Enjoy consistent, user-friendly application where paint glides off the brush and roller providing a nice, uniform sheen with good touch-up qualities.

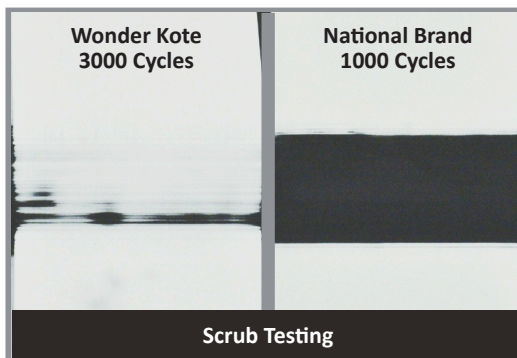

## TECHNICAL INFORMATION

### APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 Hour\*

Recoat: 4 Hours\*

\* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft./gal to achieve

4.0 mils Wet Film Thickness

1.6 mils Dry Film Thickness

Solids Content:

Volume: 40% ± 3 Weight: 53% ± 3

**BASES: FLAT - 260 SERIES • EGGSHELL - 270 SERIES • SEMI-GLOSS - 295 SERIES**

### EQUIPMENT RECOMMENDATIONS

Roller: 1/2"-3/4" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 3/4 GPM with .017" tip @ 2300-2700 PSI

HVLP: Twin-stage turbine, 5-8 PSI, .051-.070 projector set

### SAFETY AND COMPLIANCE

VOC (EPA Method 24):

27 g/L 0.22 lbs./Gal

MPI Category:

43, 44, 52, 53, 54

### PRIMER RECOMMENDATIONS

New Work

Drywall: Premium Wall Primer, 220.

Plaster/Masonry: Grip-Crete Masonry/Plaster Primer, 166.

Wood: Enamel Undercoat, 231.

Galvanized Surfaces: Enamel Undercoat, 231 or Metalguard DTM Acrylic Primer/Finish, 338.

Steel Surfaces: Metalguard Rust Inhibitive Primer, 330.

Block: Grip-Crete Fill Kote HD Block Filler, 181.

Repaint: Self-Priming.