



DESIGNER
INTERIOR

ARTISAN

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

GREAT PAINT. GREAT PEOPLE.

**hallman
lindsay**
QUALITY PAINTS®

ARTISAN

ARTISAN is our finest line of interior paint designed to provide a luxurious finish enhancing the aesthetics and livability of home and office spaces. The elegant, yet resilient, matte and eggshell formulas provide moisture and stain release for a lasting, immaculate appearance. Enhanced resin technology provides exceptional coverage, seamless touchup, and with virtually no odor, allows painting projects to nearly go undetected.

Formulated to meet the highest quality and performance standards, ARTISAN is ideal for projects requiring outstanding performance from traditional wall finishes. The durable 100% acrylic formula protects and beautifies in high moisture areas like kitchens and bathrooms as well as high traffic areas where durability matters most. ARTISAN is ideal for home and office design projects.

FEATURES

- High Solids 100% Acrylic Formula
- Long-Lasting Durable Coating
- Luxurious Finish
- Superior Burnish Resistance and Stain Release
- Anti-Microbial, Moisture-Resistant Technology

BENEFITS

Big Change, Little Maintenance


Customize home and living spaces with rich, bold, unique colors that cover easier for faster color changes. Easy application and superior touchup allow for trouble-free living and maintenance.

Lasting Beauty

The highly scrubbable, burnish resistant finish provides lasting protection from stains, scuffs, and burnishing.

Moisture-Resistant Formula

Outstanding performance in high-moisture areas fighting mildew, water spots, and discoloration in kitchens, bathrooms, and shower areas.

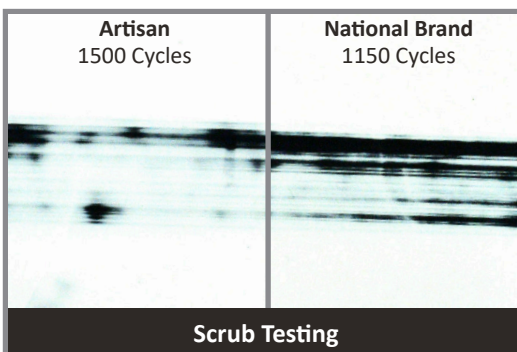

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 hour*

Recoat: 4 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

350-400 sq. ft./Gal to achieve

4.0 mils Wet Film Thickness

1.6 mils Dry Film Thickness

Solids Content:

Volume: 39% ± 2 Weight: 55% ± 2

BASES: MATTE - 263 SERIES • EGGHELL - 273 SERIES

EQUIPMENT RECOMMENDATIONS

Roller: ¼ – ½" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum ¾ GPM with .017" tip @ 2500 PSI

HVLP: Twin-stage turbine, 5–8 PSI, .051 to .070 projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0 g/L 0 lbs./Gal

MPI Category:

52, 53, 143

PRIMER RECOMMENDATIONS

New Work

Drywall: Premium Wall Primer, 220.

Plaster/Masonry: Grip-Crete Masonry/Plaster Primer, 166.

Wood: Enamel Undercoat, 231.

Galvanized Surfaces: Enamel Undercoat, 231 or Metalguard DTM Acrylic Primer/Finish, 338.

Steel Surfaces: Metalguard Rust Inhibitive Primer, 330.

Block: Grip-Crete Fill Kote HD Block Filler, 181.

Repaint: Self-Priming with two coats.