

PREMIUM
INTERIOR

COLOR EXPRESSIONS



Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

GREAT PAINT. GREAT PEOPLE.

**hallman
lindsay**
QUALITY PAINTS®

COLOR EXPRESSIONS

COLOR EXPRESSIONS is a unique, ceramic-fortified acrylic wall finish designed exclusively for deep, rich color tones. Formulated to improve hide and application, this product enhances coverage to create a more uniform finish helping to reduce the number of coats. Added ceramic technology provides scuff and burnish resistance improving the long-term appearance of rich color tones.

COLOR EXPRESSIONS accent bases are designed to improve application and durability. These zero-VOC finishes are intended for interior use and are a great choice when deep colors need increased protection. Can be applied to a variety of new and previously painted surfaces including drywall, plaster, and masonry surfaces.

FEATURES

- Ceramic-Fortified Formula*
- Excellent Flow & Leveling
- Burnish Resistance
- Zero-VOC / LEED v4 Compliant

BENEFITS

Enhanced Durability

Fortified with ceramic technology allows for increased durability and burnish protection keeping deep colors looking sharp in all areas.


Easy Application

High-hiding formula improves flow and leveling while building a more uniform finish with fewer coats.

Zero-VOC, LEED v4 Compliant

With virtually no odor, this zero-VOC product can be used with minimal disruption when custom finishing or working in occupied spaces.

*NOTE: not available in 254-R and 256.

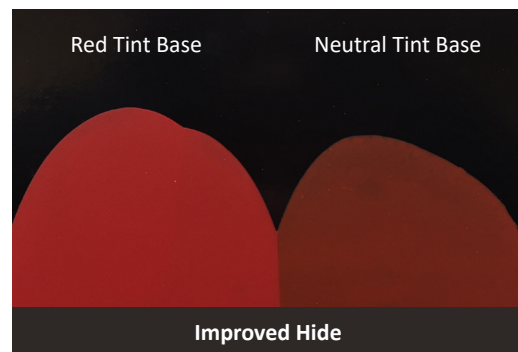

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 hour*

Recoat: 4 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

350 sq. ft./Gal to achieve

4.0 mils Wet Film Thickness

1.4 mils Dry Film Thickness

Solids Content:

Volume: 37% ± 2 Weight: 52% ± 2

BASES: FLAT - 248 SERIES • LO-SHEEN - 250 SERIES • EGGSHELL - 254 SERIES • SEMI-GLOSS 256 SERIES
• RED TINT - 254-R SERIES

EQUIPMENT RECOMMENDATIONS

Roller: 1/4" – 3/8" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum ¾ GPM with .017" tip @ 2500 PSI

HVLP: Twin-stage turbine, 5–8 PSI, .051 to .070 projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0 g/L 0 lbs./Gal

PRIMER RECOMMENDATIONS

New Work

Drywall: Premium Wall Primer, 220.

Plaster/Masonry: Grip-Crete Masonry/Plaster Primer, 166.

Wood: Enamel Undercoat, 231.

Galvanized Surfaces: Enamel Undercoat, 231, Metalguard DTM Acrylic Primer/Finish, 338.

Steel Surfaces: Metalguard Rust Inhibitive Primer, 330.

Block: Grip-Crete Fill Heavy-Duty Block Filler, 181.

Repaint: Self-Priming.