



PROFESSIONAL  
**INTERIOR**

**DROP DRY ALKYD**

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

**GREAT PAINT. GREAT PEOPLE.**

**hallman  
lindsay**  
QUALITY PAINTS®



# DROP DRY ALKYD

DROP DRY ALKYD is an interior alkyd dryfall designed for professional spray application. Overspray falls dry at or above 10 feet at 77°F with 50% relative humidity for easy sweep clean-up. Solvent-based formulation provides exceptional adhesion and helps prevent flash-rust on metal surfaces. Higher levels of titanium dioxide in the formulation means increased coverage and hide allowing for faster application.

DROP DRY ALKYD products are designed to improve light reflectance and aesthetics in interior cavernous spaces. Formulated for improved adhesion, this product allows for application to surfaces ranging from structural steel to paneling. It is ideally used in commercial and industrial buildings, including warehouses, arenas, and manufacturing facilities.

## FEATURES

- High-Hiding White
- Excellent Adhesion
- Flash-Rust Resistant
- Dry Drop (10+ ft. under normal conditions)

## BENEFITS

### SOLVENT-BASED FORMULA

Alkyd dryfall provides improved flash rust resistance and improved adhesion to marginally prepared surfaces versus traditional waterborne products.

### HIGH-HIDING FORMULA

Formulated with higher levels of titanium dioxide provides improved protection while increasing hide and coverage rates.

### CUSTOM COLORS AVAILABLE


Available in standard deck white, white, black and a tintable neutral base. Qualifying orders are available in factory batched colors in as short as two business days. Ask a Hallman Lindsay sales representative for details.



Use on Marginally Prepared Surfaces



Ideal for Overhead Work

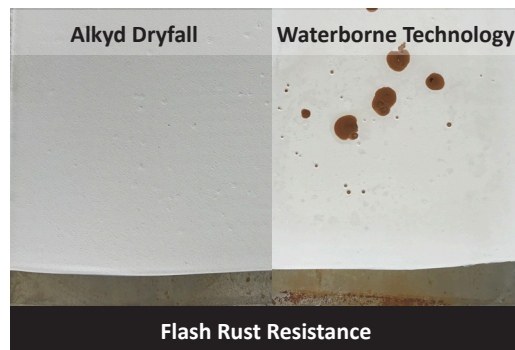

Flash Rust Resistance

## TECHNICAL INFORMATION

### APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 15 minutes\*

Recoat: 4 hours\*

\* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft./gal to achieve

4.0 mil Wet Film Thickness

1.6 mil Dry Film Thickness

Solids Content:

Volume: 38% ± 2 Weight: 61% ± 2

### BASES: FLAT - 241 SERIES • EGGSHELL - 242 SERIES

### EQUIPMENT RECOMMENDATIONS

Airless: Minimum 1 GPM, 0.021" tip @ 2300 - 2500 PSI

### SAFETY AND COMPLIANCE

VOC (EPA Method 24):

378 g/L 3.16 lbs./Gal

MPI Category:

55 and 89

### PRIMER RECOMMENDATIONS

#### New Work

Drywall: Self-priming with two coats or Pro Wall Primer, 227.

Plaster/Masonry: Grip-Crete Masonry/Plaster Primer, 166.

Wood: Self-priming with two coats or Enamel Undercoat, 231.

Galvanized Surfaces: Self-priming with two coats or Metalguard DTM Acrylic Primer/Finish, 338.

Steel Surfaces: Metalguard Rust Inhibitive Primer, 330.

Block: Grip-Crete Block Kote Block Filler, 184.

Repaint: Self-Priming.