

PREMIUM
INTERIOR

EARTHSCAPES



Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

GREAT PAINT. GREAT PEOPLE.

**hallman
lindsay**
QUALITY PAINTS®

EARTHSCAPES

EARTHSCAPES ceramic finish is designed to deliver a premium finish with exceptional durability in sensitive environments. The zero-VOC formula creates virtually no odor allowing painting to happen virtually undetected, minimizing the impact when painting in occupied spaces. The ceramic-enhanced formula creates a highly scrubbable protective barrier that repels stains and burnishes helping reduce maintenance costs.

EARTHSCAPES, with enhanced protection and improved application properties, is a premium alternative to traditional architectural finishes. LEED v4 compliance partnered with great hide and touch-up qualities make it a fantastic selection for commercial, institutional, and residential projects looking to meet the strictest air quality standards.

FEATURES

- Durable Ceramic Finish
- Easy Stain Removal
- Anti-Microbial Protection
- Virtually Odor-Free
- Exceptional Coverage
- Zero-VOC, LEED v4 Compliant

BENEFITS

Reduced Maintenance Cost

Ceramic technology provides an exceptionally washable surface that has twice the scrubability of national brands.

Zero-VOC & Virtually Odor-Free


Zero-VOC and virtually odor-free finish minimizes impact and disruption when painting in occupied spaces.

High-Hiding Coverage

The high-hiding, sag-resistant finish offers faster coverage and easier cutting helping to speed up painting projects.




Stain & Burnish Resistant Finish

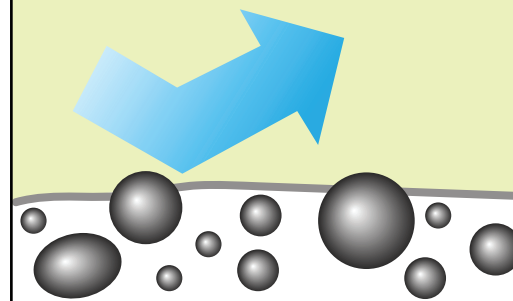


Ceramic Micro-Spheres

The Power of Ceramic Technology

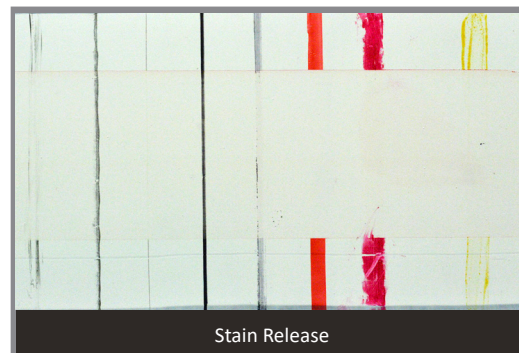

Stain Release

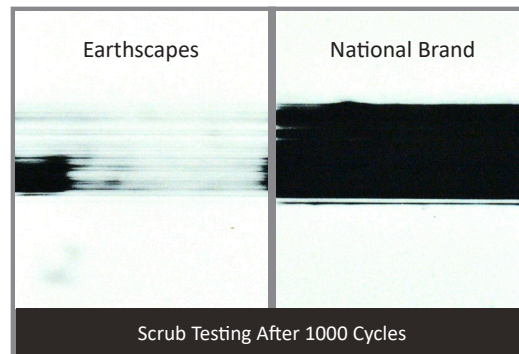

Earthscapes

National Brand

Scrub Testing After 1000 Cycles

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 hours*

Recoat: 4 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft./Gal to achieve

4.0 mils Wet Film Thickness

1.6 mils Dry Film Thickness

Solids Content:

Volume: 39% ± 2 Weight: 54% ± 2

BASES: FLAT - 261 SERIES • LO-SHEEN - 272 SERIES • EGGSHELL - 274 SERIES • SEMI-GLOSS - 281 SERIES

EQUIPMENT RECOMMENDATIONS

Roller: 1/4" – 1/2" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 3/4 GPM, .017" tip @ 2500 PSI

HVLP: Twin-stage turbine, 5-8 PSI, .051 to .070 projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0 g/L 0 lbs./Gal

MPI Category:

43, 44, 52, 53, 54, 143, 144

PRIMER RECOMMENDATIONS

New Work

Drywall: Premium Wall Primer, 220.

Plaster/Masonry: Grip-Crete Masonry/Plaster Primer, 166.

Wood: Enamel Undercoat, 231.

Galvanized Surfaces: Enamel Undercoat, 231; Metalguard DTM Acrylic Primer/Finish, 338.

Steel Surfaces: Metalguard Rust Inhibitive Primer, 330.

Block: Grip-Crete Fill Heavy-Duty Block Filler, 181.

Repaint: Self-Priming, two coats.