



PRODUCTION
INTERIOR

BUILDER'S LEGACY
HI-BUILD VINYL PRIMER/SEALER

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

GREAT PAINT. GREAT PEOPLE.

**hallman
lindsay**
QUALITY PAINTS®

HI-BUILD VINYL PRIMER/SEALER

HI-BUILD VINYL PRIMER/SEALER is a production grade primer/sealer designed to prepare new drywall for painting and texturing. The high-building nature fills exceptionally well producing uniform porosity with good enamel hold-out for improved finish coat performance. When sprayed for full coverage, it will provide good wet and dry hide while reducing telegraphing seams and picture framing.

HI-BUILD VINYL PRIMER/SEAL is designed for the high production, value-driven new construction market. Zero-VOC, LEED v4 compliant formula reduces air quality impact on fellow trades and meets strict air quality standards. Ideally used for residential and commercial production markets and topcoated with Builder's Legacy and Pro Kote interior finishes.

FEATURES

- Production-Focused Design
- Enamel Hold-Out
- Creates Uniform Surface
- Zero-VOC, LEED v4 Compliant


BENEFITS

Production-Focused Design

Fast spraying design fills and seals drywall with a single coat for faster job completion.

Environmentally Responsible Finish

This zero-VOC, LEED v4 compliant finish meets the performance needs of contractors, specifiers, builders, and general contractors looking to meet the strictest air quality standards.

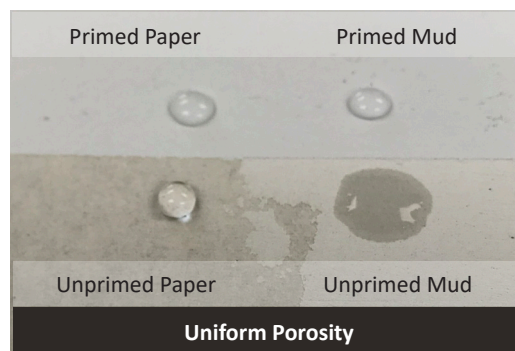

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 Hour*

Recoat: Overnight*

** Cooler temperatures and higher relative humidity will extend dry times*

Recommended Spreading Rate:

200 sq. ft./gal to achieve

8 mils Wet Film Thickness

2.3 mils Dry Film Thickness

Solids Content:

Volume: 29% ± 2 Weight: 48% ± 2

BASES: PRIMER SEALER - 350 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: .017-.021" tip @ 1800-2200 PSI

Roller: ½" - 1" nap synthetic roller cover

Brush: 100% nylon or synthetic blend

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0 g/L 0.0 lbs./Gal

MPI Category:

50, 149

FINISHING RECOMMENDATIONS

Designer Finish: Artisan Series.

Premium Finish: Wonder Kote, Lustre Kote, and Earthscapes Series .

Professional Finish: Pro Kote Series.

Builder's Legacy Finishes: Master Kote, Velvet Armor, and Premium Hi-Build Series.