



PROFESSIONAL
EXTERIOR

TIMBERSHADES
ALKYD SEMI-TRANSPARENT

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

GREAT PAINT. GREAT PEOPLE.

**hallman
lindsay**
QUALITY PAINTS®

ALKYD SEMI-TRANSPARENT

TIMBERSHADES ALKYD SEMI-TRANSPARENT is our original exterior semi-transparent deck and siding stain designed to highlight the natural beauty of wood surfaces. The deep penetrating formula provides a durable, water repellent finish that can withstand steady exposure and foot traffic. Easy single-coat application allows for easy maintenance and woodcare for years to come.

TIMBERSHADES ALKYD SEMI-TRANSPARENT is formulated for exterior use on prepared wood surfaces including decks, siding, fences, and playsets. It may be used on both new and most previously stained cedar, pine, redwood, log, half-log, shake, and other wood surfaces.

FEATURES

- Hydrophobic Technology
- Single Coat Application
- Rich and Natural Pre-Mixed Colors
- Enhanced Natural Appearance

BENEFITS

Rich and Natural Colors


Pre-mixed cedartone colors use trans-oxide pigments to provide rich, natural wood tones.

Water Repellent Finish

Special hydrophobic technology repels water to help extend the life of exterior surfaces.

Easy Application

Easy single-coat application provides an enhanced natural appearance that will never peel or flake off when applied properly.

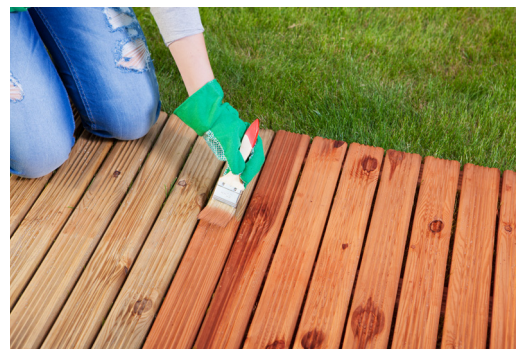

TECHNICAL INFORMATION

BASES: CEDARTONE GOLD - 197-49 • NATURAL CEDARTONE - 197-51 • CEDARTONE BROWN - 197-53
• PICKLE WHITE - 197-56

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 24 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

300-400 sq.ft./gal

Solids Content:

Volume: 33% ± 2 Weight: 38% ± 2

EQUIPMENT RECOMMENDATIONS

Roller: Lambswool 3/8" - 3/4" nap

Brush: Natural china bristle or synthetic blend

Airless: Minimum ½ GPM, .015" tip @ 1000 PSI

HVLP: Not recommended

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

343 g/L 2.86 lbs./Gal

MPI Category:

33

FINISHING RECOMMENDATIONS

New Wood Surfaces: Cedar, Redwood, Pine, Treated Pine: Apply TIMBERSHADES 197 to achieve desired appearance.

Recoating Wood Surfaces: Spot prime all bare areas with Timbershades 197. Apply TIMBERSHADES 197 to achieve desired appearance.

Repaint Surfaces: May be applied over existing coatings only after sample applications have been made to check the sensitivity of the existing coating. Surfaces must be primed and properly prepared if sensitivity or lifting occurs