



DESIGNER  
**EXTERIOR**

**TIMBERSHADES**

ALKYD-ACRYLIC SOLID

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.

**GREAT PAINT. GREAT PEOPLE.**

**hallman  
lindsay**  
QUALITY PAINTS®



# ALKYD-ACRYLIC SOLID

TIMBERSHADES ALKYD-ACRYLIC SOLID is our finest exterior solid stain designed to help beautify and protect your exterior wood surfaces. Formulated to meet the expectations of designers and architects, TIMBERSHADES ALKYD-ACRYLIC SOLID maintains the natural texture of wood surfaces while providing long-lasting color and weather protection. Hybrid alkyd-acrylic technology provides the penetration, repellency, and adhesion of an alkyd with the color retention and easy application of an acrylic.

TIMBERSHADES ALKYD-ACRYLIC SOLID provides an opaque finish and superior protection from Wisconsin's harsh weather extremes. Best used on new wood surfaces and recoating properly prepared wood surfaces. Can be used on decks, siding, logs, shingles, shake, furniture, and fencing.

## FEATURES

- Hybrid Alkyd-Acrylic Technology
- Superior Adhesion and Color Retention
- Mildew and Algae Resistant
- Hydrophobic Technology
- Natural Opaque Finish

## BENEFITS

### Hybrid Alkyd-Acrylic Technology

Advanced adhesion and durability of an alkyd with the color retention and easy application of a latex.

### Hydrophobic Technology



The long-lasting water repellent finish resists mildew, algae growth and UV degradation providing outstanding protection versus traditional finishes.

### Great Natural Appearance

The flat finish enhances the texture of wood allowing for a more natural, opaque finish.



Hallman Lindsay's TIMBERSHADES products are formulated to help enhance and protect your exterior wood surfaces from the harsh Wisconsin climate. With technology ranging from classic alkyd and acrylics to industry-leading alkyd-acrylic copolymers, TIMBERSHADES are the trusted stain products for your home.

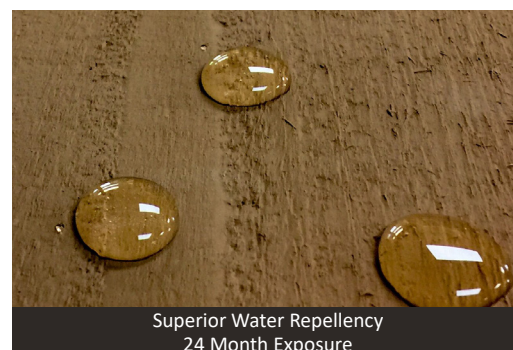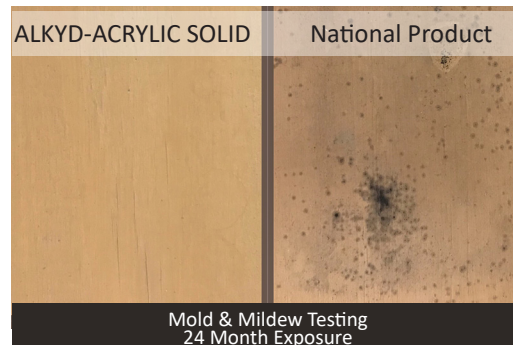

## TECHNICAL INFORMATION

### APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 6 Hours\*

Recoat: Overnight\*

\* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

200-400 sq.ft./Gal on most surfaces

Solids Content:

Volume: 37% ± 2 Weight: 54% ± 2

### BASES: CUSTOM COLORS - 188 SERIES

### EQUIPMENT RECOMMENDATIONS

Roller: 1/4"-3/8" nap synthetic cover on decks

Brush: 100% nylon or synthetic blend

Airless: Minimum 1000 psi with .015" tip

HVLP: Not recommended

### SAFETY AND COMPLIANCE

VOC (EPA Method 24):

17 g/L 0.14 lbs./Gal

MPI Category:

16

### FINISHING RECOMMENDATIONS

New Wood Surfaces:

Self-priming. If tannin staining or other types of extractive bleeding occur, one coat of Prime Kote 111 may be applied. Apply TIMBERSHADES 188 to achieve desired appearance.

Recoating Wood Surfaces:

Spot prime all bare wood with TIMBERSHADES 188 or Prime Kote 111. Apply TIMBERSHADES 188 to achieve desired appearance.