



PREMIUM
EXTERIOR

WEATHERGUARD

Hallman Lindsay serves the communities where we live and work. We provide expertise and quality products made and mixed in Wisconsin for over 60 years.


GREAT PAINT. GREAT PEOPLE.



WEATHERGUARD

Since 1956 Wisconsin has known and trusted WEATHERGUARD to protect the exteriors of homes and businesses. Combining our classic 100% acrylic formula and thixotropic technology, the outstanding brushability and film build of WEATHERGUARD has been the favorite of painters for decades.

This product is best used on most exterior surfaces such as primed metal, wood, masonry, aluminum siding, and cement board. WEATHERGUARD is designed for the exterior of your home, office, and commercial new construction or repainting projects.

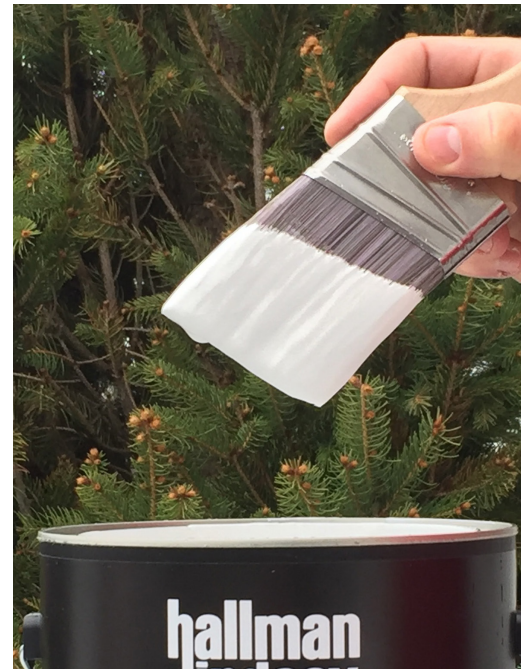

FEATURES

- Thixotropic Technology
- Cold Temperature Application
- High-Hiding
- Resistant to Dirt Pick-Up

BENEFITS

Thixotropic Technology


Thixotropic technology provides paint with a thick, hearty feel yet still glides off the brush. The “drip-less” advantage helps to cut back on drips and runs in your finish.

Outstanding Hide and Durability

The 100% acrylic formula provides outstanding hide and durability for years to come.

Cold Temperature Application

Formulated in Wisconsin for Wisconsin so cooler temperatures will not slow you down. Low-temperature rated for application down to 35 degrees.

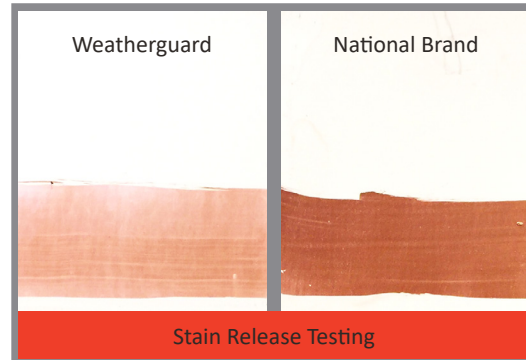

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 2 Hours*

Recoat: 4 Hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

Apply at 400 sq.ft./Gal to achieve

4.0 mils Wet Film Thickness

1.4 Dry Film Thickness

Volume Solids:

Volume: 38% ± 2 Weight: 50% ± 2

BASES: FLAT - 176 SERIES • LO-SHEEN - 174 SERIES • SATIN - 172 SERIES

EQUIPMENT RECOMMENDATIONS

Roller: 1/2" to 1" nap synthetic cover

Brush: Nylon or synthetic blend

Airless: Minimum 2500 psi with .017" tip

HVLP: Not recommended

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

89 g/L 0.82 lbs./Gal

MPI Category:

10, 11, and 15

PRIMING RECOMMENDATIONS

Aluminum Siding: Self Priming.

Galvanized Metal: Metalguard DTM Acrylic Primer/Finish, 338.

Steel: Metalguard Rust Inhibitive Primer, 330.

CMU, Concrete Block and Split Face: Grip-Crete HD Block Filler, 181.

Masonry/Stucco: Self Priming or Grip-Crete Masonry/Plaster Primer, 166.

Wood Surfaces: Prime Kote, 111 for Cedar and Redwood. All other species Prime Guard, 112.