



PREMIUM  
**INTERIOR/  
EXTERIOR**

**GRIPCRETE**  
HD BLOCK FILLER

**GREAT PAINT. GREAT PEOPLE**



hallmanlindsay.com

# HD BLOCK FILLER

GRIPCRETE HD BLOCK FILLER is a commercial grade, heavy-duty block filler designed for challenging environments and professional finishes. Formulated for interior or exterior application, this coating provides exceptional filling qualities and enamel hold-out for improved finish coat application and performance. The 100% acrylic resin provides strong adhesion and sealing that is compatible with architectural and light industrial coatings, including latex, alkyd, epoxy, and urethane coatings.

GRIPCRETE HD BLOCK FILLER is formulated to provide a smooth and durable foundation for bare, unpainted masonry surfaces. With exceptional fill and sealing qualities, it is ideally used for preparing masonry in commercial, institutional, and light industrial construction. Designed for brush, roll, or spray application to tilt-up, concrete block, cinder block, and other cured masonry surfaces.

## FEATURES

- 100% Acrylic Resin
- Exceptional Fill and Sealing Properties
- Moisture Resistant Formula
- Interior and Exterior Application
- Low-Temp Application (35°F)

## BENEFITS

### Reliable Performance


Providing a smoother surface with fewer pin-holes for improved finish coat application and performance in challenging environments.

### Excellent Adhesion & Hold-Out

This highly-compatible coating can be finished with Pro-Series finishes and other architectural and light industrial coatings.

### Moisture Resistant Formulation

The durable 100% acrylic resin allows for reliable adhesion and holdout in high moisture areas including bathrooms, showers, and commercial kitchens.

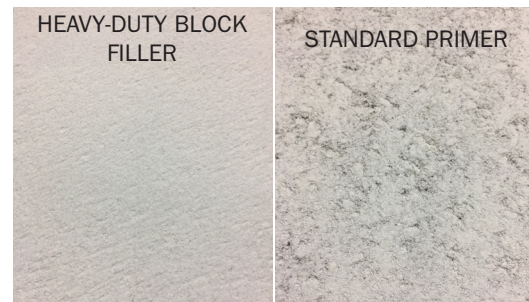

EXCELLENT FILL & SEALING PROPERTIES

## TECHNICAL INFORMATION

### APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 1 Hour\*

Recoat: Overnight\*

\* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

80-100 sq. ft. / Gal to achieve 15-20 mils WFT; 7.6-10.2 mils DFT

Solids Content:

Volume: 53% ± 2 Weight: 73% ± 2

### BASES: WHITE - 181 SERIES

### EQUIPMENT RECOMMENDATIONS

Roller: 3/4"-1 1/4" nap shed-resistant or lambswool cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 1 GPM with .021" tip @ 2300-2700 PSI

### SAFETY AND COMPLIANCE

VOC (EPA Method 24):

39 g/L 0.33 lbs./Gal

### FINISHING RECOMMENDATIONS

Interior

High-Performance Acrylic: DURATECH Series  
Designer Finish: ARTISAN and LUSTRE Series  
Premium Finish: WONDERKOTE and EARTHSCAPES Series

Professional Finish: PROKOTE Series  
Builder's Legacy Finishes: MASTERKOTE, VELVET ARMOR, and Premium Hi-Build Series  
Exterior

High-Performance Acrylic: DURATECH Series  
Designer Finish: GENERATION Series  
Premium Finish: WEATHERGUARD Series  
Professional Finish: DURAKOTE Series