



PREMIUM  
**INTERIOR/  
EXTERIOR**

**GRIPCRETE**  
BLOCK FILLER

**GREAT PAINT. GREAT PEOPLE**

SINCE 1956  
**hallman  
lindsay**  
QUALITY PAINTS®

[hallmanlindsay.com](http://hallmanlindsay.com)



# BLOCK FILLER

GRIPCRETE BLOCK FILLER is a general-purpose interior block filler designed to fill and smooth interior masonry surfaces. When applied properly, it will produce a paintable surface with reduced pin-holes to improve application and performance of subsequent finishes. The zero-VOC, LEED V4 compliant formulation meets the strictest air quality standards.

GRIPCRETE BLOCK FILLER is formulated for professional spray application to bare, unpainted masonry surfaces. The filling and sealing qualities makes it ideal for preparing masonry surfaces in commercial, institutional, and light industrial construction. Can be finished with professional latex finishes and waterborne pre-catalyzed epoxies.

## FEATURES

- Excellent Fill & Sealing Properties
- LEED v4 Credit Eligible
- High-Hiding Formula

## BENEFITS

### Labor and Material Savings


Improved filling and sealing properties fills pores with fewer pin-holes reducing the amount of time and topcoat required to finish surfaces

### Environmentally Responsible Coating

Low-odor, zero-VOC formula minimizes impact on other trades during application while meeting the strictest air quality standards.



PRODUCTION INTERIOR BLOCK FILLER

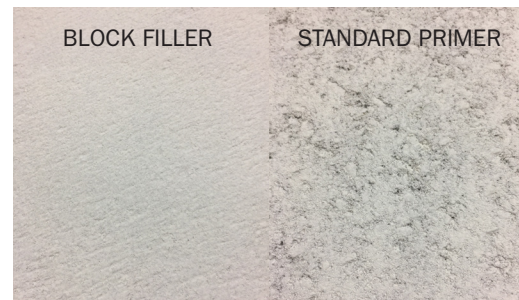

EXCELLENT FILL & SEALING PROPERTIES

## TECHNICAL INFORMATION

### APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 1 Hour\*

Recoat: Overnight\*

\* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

80-100 sq. ft. / Gal to achieve  
16-20 mils WFT; 8.5-10.5 mils DFT

Solids Content:

Volume: 48% ± 3 Weight: 69% ± 3

### BASES: WHITE - 184 SERIES

### EQUIPMENT RECOMMENDATIONS

Roller: 3/4"-1 1/4" nap shed-resistant or lambswool cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 1 GPM with .021" tip  
@2300-2700 PSI

### SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0 g/L 0.0 lbs./Gal

### FINISHING RECOMMENDATIONS

High-Performance Acrylic: AQUAPOXY1 SERIES

Designer Finish: PURE AND LUSTRE SERIES

Premium Finish: WONDERKOTE and  
EARTHSCAPES Series

Professional Finish: PRO KOTE AND RENEWAL  
Series

Builder's Legacy Finishes: MASTER KOTE,  
VELVET ARMOR, and Premium Hi-Build Series