




PREMIUM
**INTERIOR/
EXTERIOR**

GRIPCRETE
FILL & FINISH



GREAT PAINT. GREAT PEOPLE

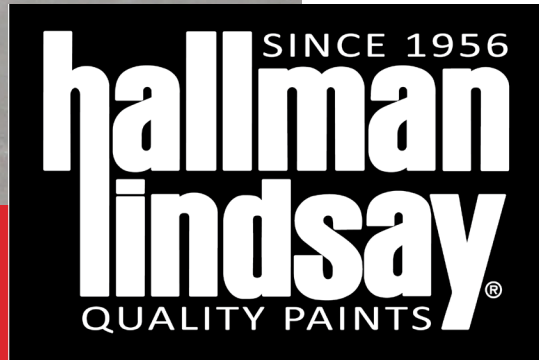

hallmanlindsay.com

FILL & FINISH

GRIPCRETE FILL & FINISH is designed to provide efficiencies and cost saving measures when coating concrete block, precast, and other masonry surfaces. The single use, high-building products reduce labor and material costs by filling, sealing, and finishing masonry surfaces in two coats instead of traditional three-coat systems. When applied properly, these products will create a smooth, pinhole-free finish that beautifies and protects masonry surfaces.

GRIPCRETE FILL & FINISH is formulated for easy and efficient finishing of masonry surfaces. The attractive satin finish provides lasting protection and application efficiencies for commercial and light industrial surfaces. Designed for application to masonry surfaces, these products can be applied to new and repainted block, brick, concrete and other masonry surfaces.

FEATURES

- Efficient Coating System
- Lasting Protection & Finish
- 100% Acrylic High-Build Finish
- Interior & Exterior Coating

BENEFITS

Increased Efficiencies

Complete jobs faster with a single-source product that primes, fill, seals, and finishes porous masonry surfaces in only two coats.

100% Acrylic Formula


All acrylic resin provides exceptional UV protection, improved dirt pick-up, and mildew resistance for increased longevity on exposed surfaces.

Easy Application

Formulated for brush, roll, and spray application, FILL & FINISH can be used on jobs ranging from finishing large, unoccupied spaces to rolling residential foundations.



EFFICIENT COATING SYSTEM

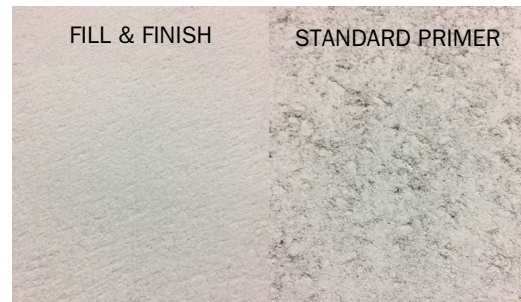

EXCELLENT FILL & SEALING PROPERTIES

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 1 Hour*

Recoat: Overnight*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

80-100 sq. ft. / Gal to achieve 15-20 mils WFT; 6-8 mils DFT

Solids Content:

Volume: 42% ± 2 Weight: 52% ± 2

BASES: 182 SERIES

EQUIPMENT RECOMMENDATIONS

Roller: 1/2" to 1" nap shed-resistant or lambswool cover

Brush: 100% nylon or synthetic blend

HVLP: Not recommended

Airless: Minimum 1 GPM airless with 3/8" hose and .025" tip, 2300-2700 psi

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

1.11 g/L 0.92 lbs./Gal

PRIMING RECOMMENDATIONS

Interior

High-Performance Acrylic: AQUAPOXY1, DURATECH, and MULTI-SURFACE ACRYLIC Series

Designer Finish: PURE and LUSTRE Series

Premium Finish: WONDERKOTE and EARTHSCAPES Series

Professional Finish: PRO KOTE and RENEWAL Series

Exterior

High-Performance Acrylic: MULTI-SURFACE ACRYLIC and DURATECH Series

Designer Finish: GENERATION Series

Premium Finish: WEATHERGUARD Series

Professional Finish: DURA KOTE Series