



PROFESSIONAL  
**INTERIOR  
EXTERIOR**

**DURATECH**  
100% ACRYLIC ENAMEL

**GREAT PAINT GREAT PEOPLE**

**hallman  
lindsay**  
SINCE 1956  
QUALITY PAINTS®

[hallmanlindsay.com](http://hallmanlindsay.com)



# DURATECH

DURATECH is a professional grade waterborne acrylic enamel designed for easy application and lasting protection. Streamline on-site maintenance projects with an all-purpose enamel that can be used on interior and exterior trim, doors, handrails, cabinets, or even as a high-performance acrylic wall coating. Drying to an alkyd-like hardness, this low-odor acrylic enamel provides stain and impact resistance that lasts. The 100% acrylic resin creates a durable and flexible coating for long-lasting color protection.

DURATECH is designed for ease of use and is applicable to all residential, commercial, and light industrial projects. This all-purpose, non-yellowing finish can be applied to walls, equipment, machinery, piping, structural steel, storage tanks, wood or metal trim, railings, pre-finished siding, furniture, windows, doors, cabinets, and shelving.

## FEATURES

- 100% Acrylic Waterborne Formula
- Excellent Color and Gloss Retention
- Easy Application
- Low-Odor and Water Clean-up

## BENEFITS

### 100% Acrylic Formula


The durable 100% acrylic resin provides fantastic color and gloss retention. Will not crack, chip, yellow, or chalk when applied to exterior surfaces.

### Easy Application

Waterborne formulation offers an easy-to-apply product with good brush and roll qualities and convenient soap and water cleanup.

### All-Purpose Enamel

Can be applied to a variety of surfaces including doors, trim, and equipment. Can also be used as a high-performance acrylic for commercial applications.

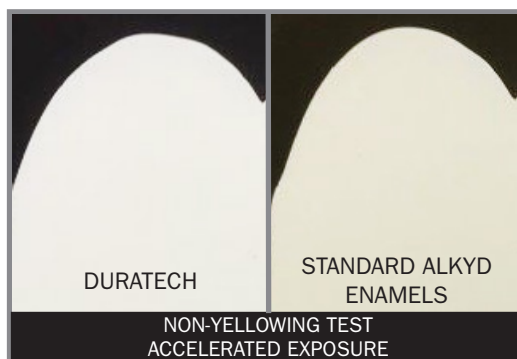

## TECHNICAL INFORMATION

### APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 40 Minutes\*

Recoat: 4 Hours\*

\* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft./gal to achieve

4.0 mils WFT; 1.4 mils DFT

Solids Content:

Volume: 33% ± 2 Weight: 44% ± 2

**BASES: SATIN - 318 SERIES · GLOSS - 317 SERIES**

### EQUIPMENT RECOMMENDATIONS

Roller: 1/2" - 3/4" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 1 GPM, .019" tip @ 2550-2950 PSI

HVLP: 3 to 4 stage turbine, 6-8 PSI, .051-.070 projector set

### SAFETY AND COMPLIANCE

VOC (EPA Method 24):

60 g/L 0.50 lbs./Gal

### PRIMING RECOMMENDATIONS

New Work

Wood Surfaces (Interior): Enamel Undercoat, 231.

Wood Surfaces (Exterior): PRIME KOTE, 111; PRIMEGUARD, 112.

Rough Masonry/Concrete Block: GRIPCRETE Masonry Surfer, 179.

Smooth Masonry/Brick: GRIPCRETE Masonry/Plaster Primer, 166.

Metal, Ferrous: METALGUARD Rust-Inhibitive QD Primer, 330.

Metal, Non-Ferrous: ACRYLIC DTM Primer/Finish, 338.

Repaint Surfaces: May be applied over existing coatings only after sample applications have been made to check the sensitivity of the existing coating. Surfaces must be primed and properly prepared if sensitivity or lifting occurs