




CLASSIC

INTERIOR

BUILDER'S LEGACY
PROFESSIONAL PRIMER SURFACER



GREAT PAINT GREAT PEOPLE

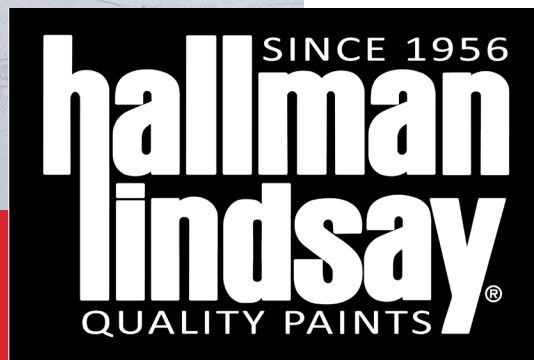

hallmanlindsay.com

PROFESSIONAL PRIMER SURFACER

PROFESSIONAL PRIMER SURFACER is high-building primer/sealer formulated to improve finish coat performance on residential and commercial projects. The added film thickness helps to reduce signs of drywall repair and trade damage typically found in commercial construction. Improved film integrity creates a uniform porosity between drywall paper and joint compound that is compatible with all interior finishes.

PROFESSIONAL PRIMER SURFACER is designed to minimize the minor surface imperfections found on walls and ceilings including nicks, dents, paper fuzz, and mud pinholes. Formulated specifically for professional spray application, it is ideally suited for commercial and production application.

FEATURES

- High-Building Primer/Sealer
- Available in High and Low Viscosity
- Great Enamel Hold-Out
- LEED v4 Credit Eligible

BENEFITS

Custom-Tailored Application

Unique offering of multiple viscosity options for customized application tailed to professional sprayers.

Improved Drywall Finishing

Improve overall drywall appearance by smoothing out minor drywall imperfections while preparing surfaces for finish coats of any sheen level.

Environmentally Responsible Coating

This zero-VOC, LEED v4 credit eligible finish meets the performance needs of contractors, specifiers, and general contractors looking to meet the strictest air quality standards.



HI-BUILD PRO SURFACER
UP TO 50 MIL

DRYWALL PRIMER
UP TO 30 MIL

MAXIMUM FILM BUILD - SAG TEST



REDUCE TELEGRAPHING WITH SURFACERS

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H.:

To Touch: 1 Hour*

Recoat: Overnight*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

160 sq .ft. /Gal to achieve
10 mils WFT; 3.7 mils DFT

Solids Content:

Volume: 37% ± 2 Weight: 58% ± 2

BASES: ANTIQUE IVORY - 367-2

PEARL WHITE - 367-3

EQUIPMENT RECOMMENDATIONS

Roller: 1/2"-1" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum 1 GPM with .021" tip @
2700 - 3100 PSI

HVLP: 3-4 stage turbine, 6-8 PSI, .051-.070
projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0.011 g/L 0.0 lbs./Gal

FINISHING RECOMMENDATIONS

High-Performance Acrylic: DURATECH Series

Designer Finish: PURE and LUSTRE Series

Premium Finish: WONDERKOTE and EARTHSCAPES Series

Professional Finish: PRO KOTE Series

Builder's Legacy Finishes: MASTER KOTE, VELVET ARMOR, and PREMIUM HI-BUILD Series