



PREMIUM

INTERIOR

AQUA ALKYD
INTERIOR ACRYLIC-ALKYD ENAMEL



GREAT PAINT GREAT PEOPLE



hallmanlindsay.com

AQUA ALKYD

AQUA ALKYD is a waterborne enamel designed to provide exceptionally smooth, durable finishes for door, trim, and cabinets. Hybrid technology creates a finish that combines alkyd-like durability and hardness with the convenience of low-odor, soap and water clean-up. This high-hiding enamel self-levels to help eliminate brush marks and roller stipple producing a smooth, spray-quality finish.

AQUA ALKYD is designed for consistent, smooth finishing of properly prepared wood and metal trim, molding, cabinets, and doors. It may be used on a variety of projects ranging from residential and multi-family construction to commercial, institutional, and light industrial facilities. With virtually no odor and LEED v4 compliance, it is an ideal enamel for sustainability-focused projects.

FEATURES

- Advanced Alkyd-Acrylic Technology
- Zero-VOC, LEED v4 Compliant
- Exceptional Flow and Leveling
- Early Block Resistance*

BENEFITS

Ultra-Smooth Finish

Advanced alkyd-acrylic technology provides a smooth finish free of brush marks with minimal effort


HYBRID TECHNOLOGY

Hybrid technology delivers the best of both worlds by providing the smooth, durable finish of an alkyd with the easy application of an acrylic.

Zero-VOC Formulation

The zero-VOC, LEED v4 compliant formulation makes Aqua Alkyd the ideal product for painting in occupied spaces or any project requiring the highest level of air quality standards.

*NOTE: Increased tint load slows dry time

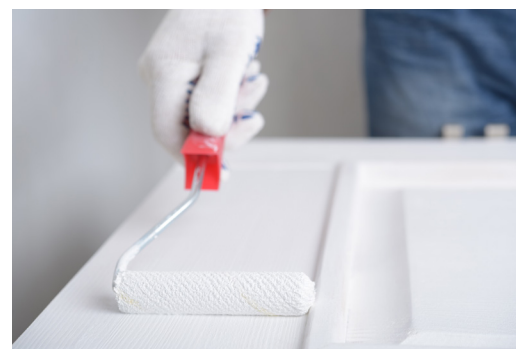

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 4-6 Hours* Recoat: Overnight*

*Cooler temperatures and higher relative humidity will extend dry times

Application Temperature:

Apply Down to 50° F. Ask for details.

Recommended Spreading Rate:

400 sq. ft. /Gal to achieve
4.0 mils WFT; 2.1 mils DFT

Solids Content:

Volume: 41% ± 2 Weight: 54% ± 2

BASES: SATIN - 292 SERIES · SEMI-GLOSS - 293 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum .50 GPM, 2600 PSI,
.012-.014" Tip

HVLP: Twin-stage turbine, 5-8 PSI, .051 to
.070 projector set

Roller: ¾" nap shed-resistant cover

Brush: Nylon or Synthetic Blend

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0.808 g/L 0.01 lbs./Gal

PRIMING RECOMMENDATIONS

New Work - Interior

Wood: AQUA KOTE Enamel Undercoat, 231.

Galvanized Surfaces: AQUA KOTE Enamel Undercoat, 231, ACRYLIC DTM Primer/Finish, 338.

Steel Surfaces: METALGUARD QD Rust-Inhibitive Primer, 330

Block: Appropriate GRIPCRETE Block Filler or Surfacers.

Repaint: May be applied over existing coatings only after sample applications have been made to check the sensitivity of the existing coating. Surfaces must be primed and properly prepared if sensitivity or lifting occurs.