



DESIGNER


INTERIOR



CLEARGUARD

WATERBORNE ACRYLIC URETHANE

GREAT PAINT GREAT PEOPLE

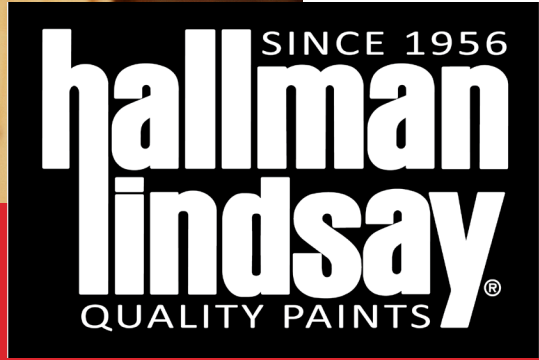

hallmanlindsay.com

WATERBORNE ACRYLIC URETHANE

CLEARGUARD WATERBORNE ACRYLIC URETHANE is a premium clear finish for interior wood surfaces. This water-white satin finish provides a beautiful, crystal-clear coating that is non-yellowing for truer wood tones that last. With good resistance to water, oils, household cleaners, and abrasion, CLEARGUARD WATERBORNE ACRYLIC URETHANE brings durable protection to wood surfaces.

CLEARGUARD WATERBORNE ACRYLIC URETHANE is designed to protect a variety of vertical wood surfaces with a crystal-clear finish. With easy brush, roll, pad, and spray application, it is ideally used on doors, trim, cabinets, furniture, and other craft projects. Designed strictly for vertical surfaces, it is not intended to be used on cutting boards, counter tops, or walking surfaces.



FEATURES

- Crystal-Clear, Non-Yellowing Finish
- Attractive Satin Finish
- Low-Odor Formula
- Soap & Water Clean-Up

BENEFITS

Crystal Clear Finish

Acrylic-urethane technology provides a crystal-clear finish free of any amber toning for truer tones when working with white woods like maple and white ash.

Smooth, Uniform Finish

Self-leveling technology helps reduce lap lines, roller stipple, and brush strokes to provide a smooth, seamless finish.

Low-Impact Finish

Waterborne Technology allows for minimal odor, low VOC's, and an easy soap and water cleanup formula.



TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 30 Minutes*

Recoat: 3 Hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400-535 sq. ft./ Gal to achieve 3.0-4.0 mils WFT; 1.0-1.2 mils DFT

Solids Content:

Volume: 31% ± 3 Weight: 34% ± 3

BASES: SATIN - V364 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum 1/2 GPM with .013" tip @ 2300-2700 PSI

Conventional: Binks #7 gun, 36 needle, 36SD air nozzle, 36 fluid nozzle, 7.8 CFM @ 30 PSI

HVLP: Twin-stage turbine, 5-8 PSI, .051 to .070 projector set

Roller: 1/4" nap shed-resistant or lambswool cover

Brush: 100% Nylon or synthetic blend

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

254 g/L 2.12 lbs./Gal

FINISHING RECOMMENDATIONS

New Work:

Stain: Woodshades Interior Stain Series.

Sealer (optional): Spray Kote Sanding Sealer, v372.

Recoat Surfaces: May be applied over existing coatings only after sample applications have been made to check the sensitivity of the existing coating. Surfaces must be properly prepared if sensitivity or lifting occurs.