



MADE & MIXED

PROFESSIONAL **INTERIOR**

DROP DRY
ALKYD DRYFALL



GREAT PAINT GREAT PEOPLE

SINCE 1956
**hallman
lindsay**
QUALITY PAINTS®

hallmanlindsay.com

DROP DRY ALKYD

DROP DRY ALKYD is an interior alkyd dryfall designed for professional spray application. Overspray falls dry at or above 10 feet at 77°F with 50% relative humidity for easy sweep clean-up. Solvent-based formulation provides exceptional adhesion and helps prevent flash-rust on metal surfaces. Higher levels of titanium dioxide in the formulation means increased coverage and hide allowing for faster application.

DROP DRY ALKYD products are designed to improve light reflectance and aesthetics in interior cavernous spaces. Formulated for improved adhesion, this product allows for application to surfaces ranging from structural steel to paneling. It is ideally used in commercial and industrial buildings, including warehouses, arenas, and manufacturing facilities.

FEATURES

- High-Hiding White
- Excellent Adhesion
- Flash-Rust Resistant
- Dry Drop (10+ ft. under normal conditions)

BENEFITS

SOLVENT-BASED FORMULA


Alkyd dryfall provides improved flash rust resistance and improved adhesion to marginally prepared surfaces versus traditional waterborne products.

HIGH-HIDING FORMULA

Formulated with higher levels of titanium dioxide provides improved protection while increasing hide and coverage rates.

CUSTOM COLORS AVAILABLE

Available in standard deck white, white, black and a tintable neutral base. Qualifying orders are available in factory batched colors in as short as two business days. Ask a Hallman Lindsay sales representative for details.

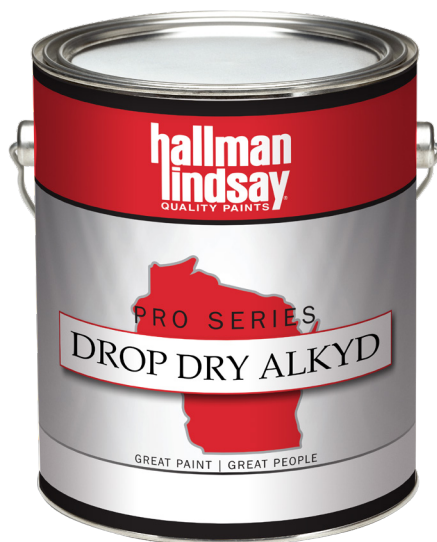

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 15 minutes*

Recoat: 4 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft./gal to achieve

4.0 mil WFT; 1.6 mil DFT

Solids Content:

Volume: 39% ± 2 Weight: 62% ± 2

BASES: FLAT - 241 SERIES EGGSHELL - 242 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum 1 GPM, 0.021" tip @ 2300 - 2500 PSI

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

366 g/L 3.06 lbs./Gal

PRIMER RECOMMENDATIONS

New Work

Drywall: Self-priming with two coats, or Pro Wall Primer/Sealer, 227.

Plaster/Masonry: GRIPCRETE Masonry/Plaster Primer, 166.

Wood: Self-priming with two coats, or AQUA KOTE Enamel Undercoat, 231.

Galvanized Surfaces: ACRYLIC DTM Primer/Finish, 338.

Steel Surfaces: METALGUARD Rust-Inhibitive QD Primer, 330.

Block: GRIPCRETE Block Filler, 184.

Repaint: Self-Priming.