



PREMIUM

EXTERIOR

PRIMEGUARD
ACRYLIC STAIN-BLOCKING PRIMER



GREAT PAINT GREAT PEOPLE



hallmanlindsay.com

PRIMEGUARD

PRIMEGUARD is a premium acrylic primer that provides exceptional adhesion and sealing of new and existing exterior wood surfaces. Alkyd-modified waterborne technology offers great adhesion to bare and previously coated wood that outperforms multi-purpose primers. The unique formulation provides a flexible seal that is perfectly suited for Wisconsin's varying climate.

PRIMEGUARD ACRYLIC PRIMER is designed for application to new and previously painted exterior surfaces such as wood and hardboard siding as well as cured plaster, stucco, and masonry. It is not intended to be used as a stain blocker or specialty adhesion primer over slick surfaces. Can be top-coated with both alkyd and acrylic finishes.



FEATURES

- Low Odor Water-Based Formula
- Faster Recoat Time
- High Hiding
- Exceptional Flexibility

BENEFITS

Exceptional Flexibility & Grip


This modified acrylic primer provides a flexibility of an acrylic primer with the strong adhesion and penetration of an alkyd for long-lasting adhesion and protection.

Faster Recoat Times

When stain blocking is not required, this premium exterior primer allows for same-day finishing with latex, acrylic, and alkyd finishes.

Easy Application

Waterborne technology provides a high hiding, low odor primed surface without the hassle of cleaning solvents or specialty brushes.

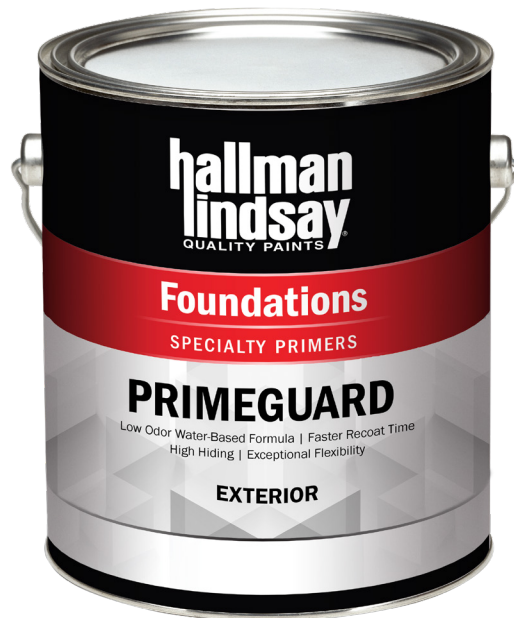

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 1 hour*

Recoat: 6-8 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft./gal to achieve 4.0 mils WFT; 1.3 mils DFT

Solids Content:

Volume: 33% ± 2 Weight: 47% ± 2

BASES: WHITE - 112 SERIES · RED - 112-R SERIES

EQUIPMENT RECOMMENDATIONS

Roller: 1/2"-3/4" nap shed-resistant cover or lambswool cover

Brush: 100% Nylon or synthetic blend

Airless: Minimum 3/4 GPM with .017" tip @ 2000 PSI

HVLP: Twin-stage turbine, 5 – 8 PSI, .051 to .070 projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

25 g/L 0.21 lbs./Gal

FINISHING RECOMMENDATIONS

High-Performance Acrylic: DURATECH Series

Designer Finish: GENERATION Series

Premium Finish: WEATHERGUARD Series

Professional Finish: DURA KOTE Series

Stain Finishes: TIMBERSHADES 188, TIMBERSHADES Acrylic Stain 185