



PROFESSIONAL
INTERIOR

PRO KOTE
INTERIOR LATEX WALL FINISH



GREAT PAINT GREAT PEOPLE

SINCE 1956
**hallman
lindsay**
QUALITY PAINTS®

hallmanlindsay.com

PRO KOTE

PROKOTE is a professional line of interior latex finishes designed for reliable, everyday performance. High-hiding and low-spatter features provide easier application for faster coverage, improved productivity, and faster job turnaround. MPI certified, LEED v4 compliant formulation delivers easy production application with outstanding touch-up ideal for commercial and institutional projects meeting the strictest air quality standards.

PROKOTE is designed to deliver easy and consistent results for the professional painter. The durable finish can be applied to drywall, plaster, wallboard, and other prepared surfaces. It is ideally suited for maintenance and new construction painting for commercial, institutional, and residential projects. May also be applied in light industrial facilities in non-corrosive areas.

FEATURES

- Zero-VOC, LEED v4 Compliant
- Easy Application
- Cost & Labor Savings
- Professional Interior Finish

BENEFITS

Production Driven Performance

High-hiding, sag and spatter resistant formula delivers quicker coverage for reduced labor and material costs.

Versatile Application


Easy brush, roll, and spray application with outstanding durability and touch-up provide value to professional painters during application and maintenance technicians for ongoing upkeep.

Environmentally Responsible Finish

Zero-VOC, LEED v4 compliant finish meets the performance needs of contractors, specifiers, property managers, and general contractors looking to meet the strictest air quality standards.



LOW-SPATTER APPLICATION

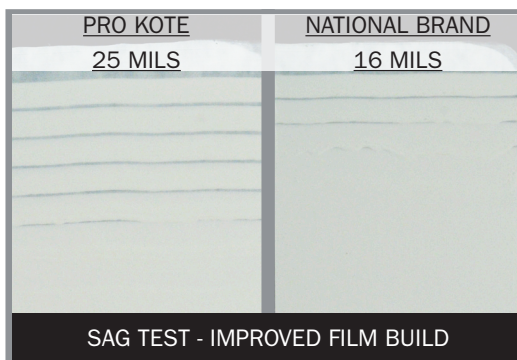

SAG TEST - IMPROVED FILM BUILD

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To Touch: 1 Hours* Recoat: 2 hours*

*Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

400 sq. ft. /Gal to achieve
4.0 mils WFT; 1.2 mils DFT

Solids Content:

Volume: 50% ± 2 Weight: 32% ± 2

BASES: FLAT • 264 SERIES • LO-SHEEN • 283 SERIES • EGGSHELL • 284 SERIES • SATIN • 294 SERIES • SEMI-GLOSS • 296 SERIES

EQUIPMENT RECOMMENDATIONS

Airless: Minimum .70 GPM, 2500 PSI,
.017-.019" Tip

HVLP: Twin-stage turbine, 5-8 PSI, .051 to
.070 projector set

Roller: ½" - ¾" nap synthetic cover

Brush: 100% Nylon or Synthetic Blend

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

0 g/L 0.0 lbs./Gal

PRIMER RECOMMENDATIONS

New Work

Drywall: Appropriate BUILDERS LEGACY Primer/
Sealer or Surfacer.

Plaster/Masonry: GRIPCRETE Masonry/Plaster
Primer, 166.

Wood: AQUA KOTE Enamel Undercoat, 231.

Galvanized Surfaces: AQUA KOTE Enamel
Undercoat, 231, ACRYLIC DTM Primer/Finish,
338.

Steel Surfaces: METALGUARD QD Rust-Inhibitive
Primer, 330

Block: Appropriate GRIPCRETE Block Filler or
Surfacer.

Repaint: Self-Priming (requires two coats).