



PROFESIONAL

INTERIOR

RENEWAL
LATEX WALL FINISH

GREAT PAINT GREAT PEOPLE

SINCE 1956
**hallman
lindsay**
QUALITY PAINTS®

hallmanlindsay.com

RENEWAL

RENEWAL finishes are designed to meet the needs specific to ongoing property maintenance. The fast drying, low spatter formula allows painted and affected areas to be painted and quickly returned to service. With virtually no odor, this zero-VOC maintenance finish meets the most stringent air quality standards reducing downtimes and impact in occupied spaces.

RENEWAL finishes have been specially designed for buildings requiring frequent painting including rental properties, retail shops, hotels, offices, and recreational facilities. May be used on a variety of interior surfaces such as drywall, plaster, masonry, wood, and properly primed metals.

FEATURES

- Fast Return to Service
- Maintenance-Friendly Finish
- Reduced Disruption
- Low-Odor, Zero-VOC

BENEFITS

Faster Turnovers

High-hiding formula allows for coverage over typical wear in traffic areas.

Easy Application

The low-spatter, easy application formula allows for a forgiving finish that can be applied by painters of all skill levels, from first-time painters to life-long maintenance professionals.

Reduced Disruption in Occupied Spaces


This low-impact product is perfectly suited for fast turns on rental properties and fast return to service in offices and other occupied spaces.



MAINTENANCE-FRIENDLY FINISH



FAST COVERAGE

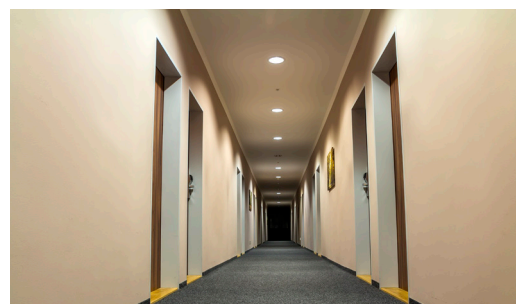

QUICK DRY FOR FAST RETURN TO SERVICE

TECHNICAL INFORMATION

APPLICATION INFORMATION

Drying Time at 77° F 50% R.H:

To touch: 1 hour*

Recoat: 4 hours*

* Cooler temperatures and higher relative humidity will extend dry times

Recommended Spreading Rate:

350 sq. ft. / Gal to achieve
4.0 mils WFT; 1.3 mils DFT

Solids Content:

Volume: 28% ± 2 Weight: 48% ± 2

BASES: FLAT - 266 SERIES EGGSHELL - 277 SERIES

EQUIPMENT RECOMMENDATIONS

Roller: ½" - ¾" nap synthetic cover

Brush: 100% nylon or synthetic blend

Airless: Minimum ¾ GPM with .017" tip @ 2500 PSI

HVLP: Twin-stage turbine, 5-8 PSI, .051 to .070 projector set

SAFETY AND COMPLIANCE

VOC (EPA Method 24):

<5 g/L 0.04 lbs./Gal

PRIMER RECOMMENDATIONS

New Work

Drywall: Pro Wall Primer/Sealer, 227.

Plaster/Masonry: GRIPCRETE Masonry/Plaster Primer, 166.

Wood: Enamel Undercoat, 231.

Galvanized Surfaces: Enamel Undercoat, 231 or ACRYLIC DTM Primer/Finish, 338.

Steel Surfaces: METALGUARD Rust Inhibitive Primer, 330.

Block: GRIPCRETE Block Filler, 184.

Repaint: Self-Priming with two coats.